


Congratulations on purchasing an EDISION OS MIO + 4K S2X + S2/T2/C

Please note that this information is valid at the time of publication.

Current information and detailed user manuals can be found on the Internet at: www.edision.gr

1 Unpacking



Remote control with 2 AAA batteries



Documentation



Service note

Please contact your EDISION specialist dealer for any further support and service.

Receiver EDISION OS MIO + 4K S2X + S2/T2/C

Notes: The front is factory fitted with a protective foil which can be removed easily and with caution. (Protective foil only for devices with display)

The scope of delivery may also include parts not listed here


Front Panel

- ① POWER button: Activates/Deactivates the device
- ② CH- / CH+ buttons: for moving in the program lists
- ③ Infrared sensor for the reception of remote control commands
- ④ Display OLED, displays current information



Back Panel

- ⑤ LNB B S2 IN: Connection for the coaxial cable to the signal from the satellite system
- ⑥ Input for connecting to terrestrial or cable signal from the antenna
- ⑦ LNB A S2X IN: Connection for the coaxial cable to the signal from the satellite system
- ⑧ S/PDIF: Audio interface for amplifier/audio console
- ⑨ HD OUT: Connection to an HDTV quality TV
- ⑩ ETHERNET: Ethernet port RJ45 10/100 Mbps
- ⑪ USB 2: Connection for USB storage devices
- ⑫ IR IN: Infrared connection port
- ⑬ RS 232: For connecting to a PC, using RS-232 cable, for receiver software update
- ⑭ Connection for an adapter (DC 12V/2,0A)
- ⑮ WiFi: 2 x External Antennas 5G/2.4G
- ⑯ Card reader

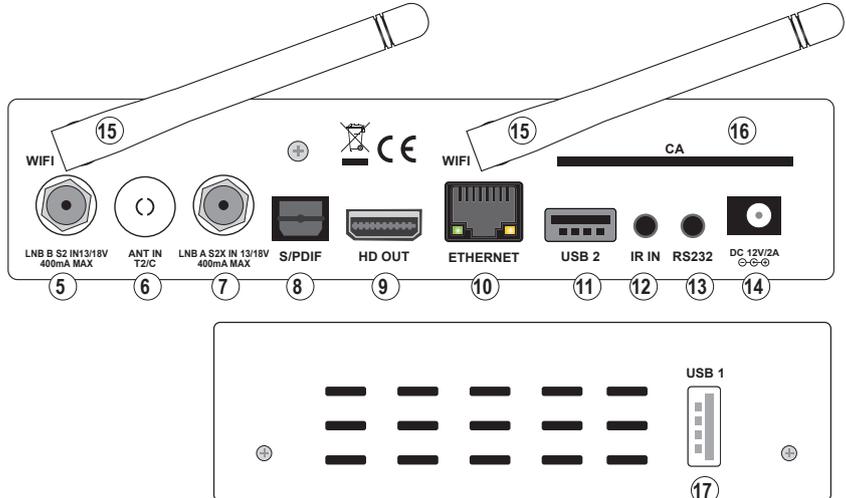

Subpage

- ⑰ USB 1: Connection for USB storage devices

2 Connecting and switching on


Note: For interference-free satellite TV reception, a specialist technician must calibrate your satellite TV system with a digital TV level meter

- Connect the receiver using **HDMI cable** via the HD OUT output port to your TV's HDMI input port
- Now connect the receiver to the satellite and antenna cable via the **ANT IN, LNB A or LNB B** input.
- Insert the batteries into the remote control. Notes on the remote control can be found on the back of these instructions.
- Connect the receiver to the power supply.
- The receiver starts with the BOOT process and is operational within a short time

LNB B: Connecting the cable to the satellite signal **DVB-S2**

ANT IN: coaxial-wire input from terrestrial / cable signal **DVB-T2/C**

LNB A: Connecting the cable to the satellite signal **DVB-S2X**

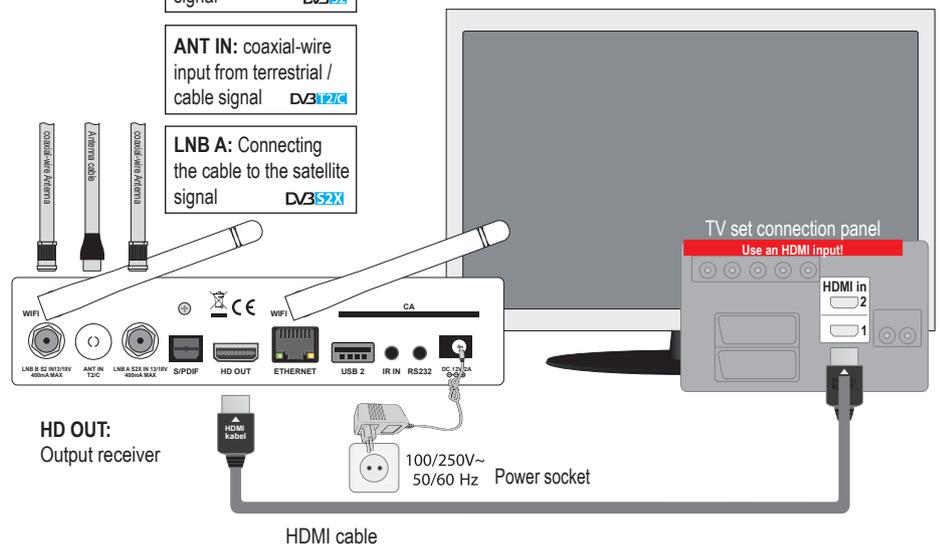

For information about **EDISION Hardware or Software** matters, please contact support@edision.gr

3 Remote Control UNIVERSAL 2in1



EDISION UNIVERSAL 2in1 REMOTE CONTROL is compatible with all EDISION STB's*, plus it is pre-programmed with 5 basic functions for SAMSUNG & LG** tv sets. Alternatively, you can program its 5 programmable buttons to any 5 functions of your TV.

Power
Switches between operation and standby

< (PREV)
Return to the previous channel/service or move to the end of the Service List or the Play List

Help
This provides users with a quick guide of using Edision OS MIO+ 4K

Menu
Open main menu & select sub menu using by navigation buttons

EXIT
Close and return to the previous menu and screen

TV / RADIO
Switch to TV mode.
Switch to Radio mode

COLOR BUTTONS
Activates certain menu functions.
Usage instructions are shown in each OSD menu

Audio
Select an audio track and a sound mode

PLAY
Starts timeshift if available

REC
Activates immediately recording-option



NUMERIC KEY (0-9)
Control the numerical operation and change the Channel/Service number directly

> (NEXT)
Go to the next channel/service or move to the beginning of the Service List or the Play List

TIMER
Start timer function

INFO
Displays the Electronic Program Guide (EPG) information if provided

EPG
Displays the Electronic Program Guide (EPG) information if provided

Mute
Mutes or unmutes the audio temporarily

TEXT
Switch between the teletext and TV modes

SUBTITLE
Display the subtitle language list


Notes: Many of the listed buttons have multiple functions, which, are displayed in the menus. Some buttons and functions are optional. Important functions and buttons are briefly explained below. The buttons to be used are marked in red in the diagrams.

MANUAL INSTRUCTION FOR LEARN REMOTE CONTROL EDISION UNIVERSAL 2in1

Your set-top-box remote control has 5 learning-function keys, in the up right hand side TV keypad panel area. Each one can be used accordingly as the following example:

1. Turning your TV set ON/OFF [TV POWER]
2. Selecting screen RATIO [Auto, 16:9, 4:3, etc]
3. Increasing/decreasing volume [VOL+ , VOL-]
4. Command confirmation [BACK or EXIT]

The other 48 keys are for the control of the EDISION set-top-box.



SET UP FOR LEARNING FUNCTION

- Press [TV POWER] key in the up right hand side TV keypad panel area continuously for 5 Sec. until the LED lights up and keep lighting, then release the key. This means the remote control is in the learning mode.
- Within 10 seconds, press the key in the original TV IR control, which needs to be learned, for example the [POWER] key, then the red LED is flashing. It means this button is ready to receive the learning signal.
- Aim the emission port of the original TV remote control at the front at the emission port at the front of your set-top box remote control (distance between these two ports has to be about 2~3 CM).
- Then press the key which is to be learned in your original TV remote control, for example the [POWER] key of your original TV remote control continuously for 3 seconds. If the red LED flashes quickly for three times and keep lighting, it means the set-top box remote control has succeeded in receiving the signal and you have completed the learning procedure of ON/OFF [TV POWER] key.
- Then release the [POWER] key of your original TV remote control.

If the copying procedure fails, the red LED will blink and stay OFF. In this case please repeat the procedure.

For the next programmable function, please repeat steps 1 to 3:

- Selecting screen ratio with RATIO [Auto, 16:9, 4:3, etc]
- Increasing/decreasing volume [VOL+ , VOL-]
- Command confirmation [BACK or EXIT]

Now you can operate your TV with the 5 programmed by you keys of your set-top box remote control. During the operation, the LED will flash to indicate that the signal is transmitted!

* For EDISION STB compatibility, please visit our webpage

**LG & SAMSUNG are brand names that belong solely to LG Electronics Inc. and Samsung Electronics Co., Ltd respectively. Any brand name reference in this text is only for informational purposes towards the consumer that is interested in the product.

Visit us on:

www.edision.gr