

CXT 18C coaxial cable Dca Euroclass

RG-6 coaxial cable with copper inner conductor and copper-clad aluminium braid (Cu/CCA), double shielded. A 18C cable with LSFH (Low Smoke, Free of Halogen) sheath. It includes an anti-migrating film that makes easier the cable stripping process by avoiding damage to the braid, as well as preventing deterioration of the interior of the cable.

Ref.	214210
EAN13	8424450278246

Other features

Colour	White
Dispenser	Without dispenser
Length	100.00 m

Packaging info

Coil	100 m
Pallet	6000 m

Physical data

Net weight	38.00 g
Gross volume	0.05 dm ³
Gross weight	40.00 g
Width	7.00 mm
Height	1,000.00 mm
Depth	7.00 mm
Main product weight	38.00 g

Highlights

- Copper inner conductor and copper-clad aluminium braid

- Dca-s2,d2,a2 Euroclass
- The anti-migrating film prevents sheath's additive agents and humidity migration to the inner cable, thus avoiding deterioration in the characteristics
- External LSFH sheath for indoor use, recommended for crowded environments
- 75 Ohm characteristic impedance
- Wrapped coil

Discover

Double-shielded Class B coaxial cable

They provide two shielding layers and belong in EN 50117 standard Class B, according to their structural properties:

- For 5 MHz - 30 MHz => TI < 15 mΩ/m
- For 30 MHz - 1000 MHz => SA > 75 dB
- For 1000 MHz - 2000 MHz => SA > 65 dB
- For 2000 MHz - 3000 MHz => SA > 55 dB

Where the transfer impedance (TI) defines how effective the shielding is at low frequencies, while the shielding attenuation (SA) defines it in the 30 MHz-to-3000 MHz range.

Mounting details


DETAIL VIEW OF THE COAXIAL CABLE SECTION

A-Inner conductor

B-Dielectric

C-Foil

D-Braid
E- Anti-migrating film
F-Outer sheath

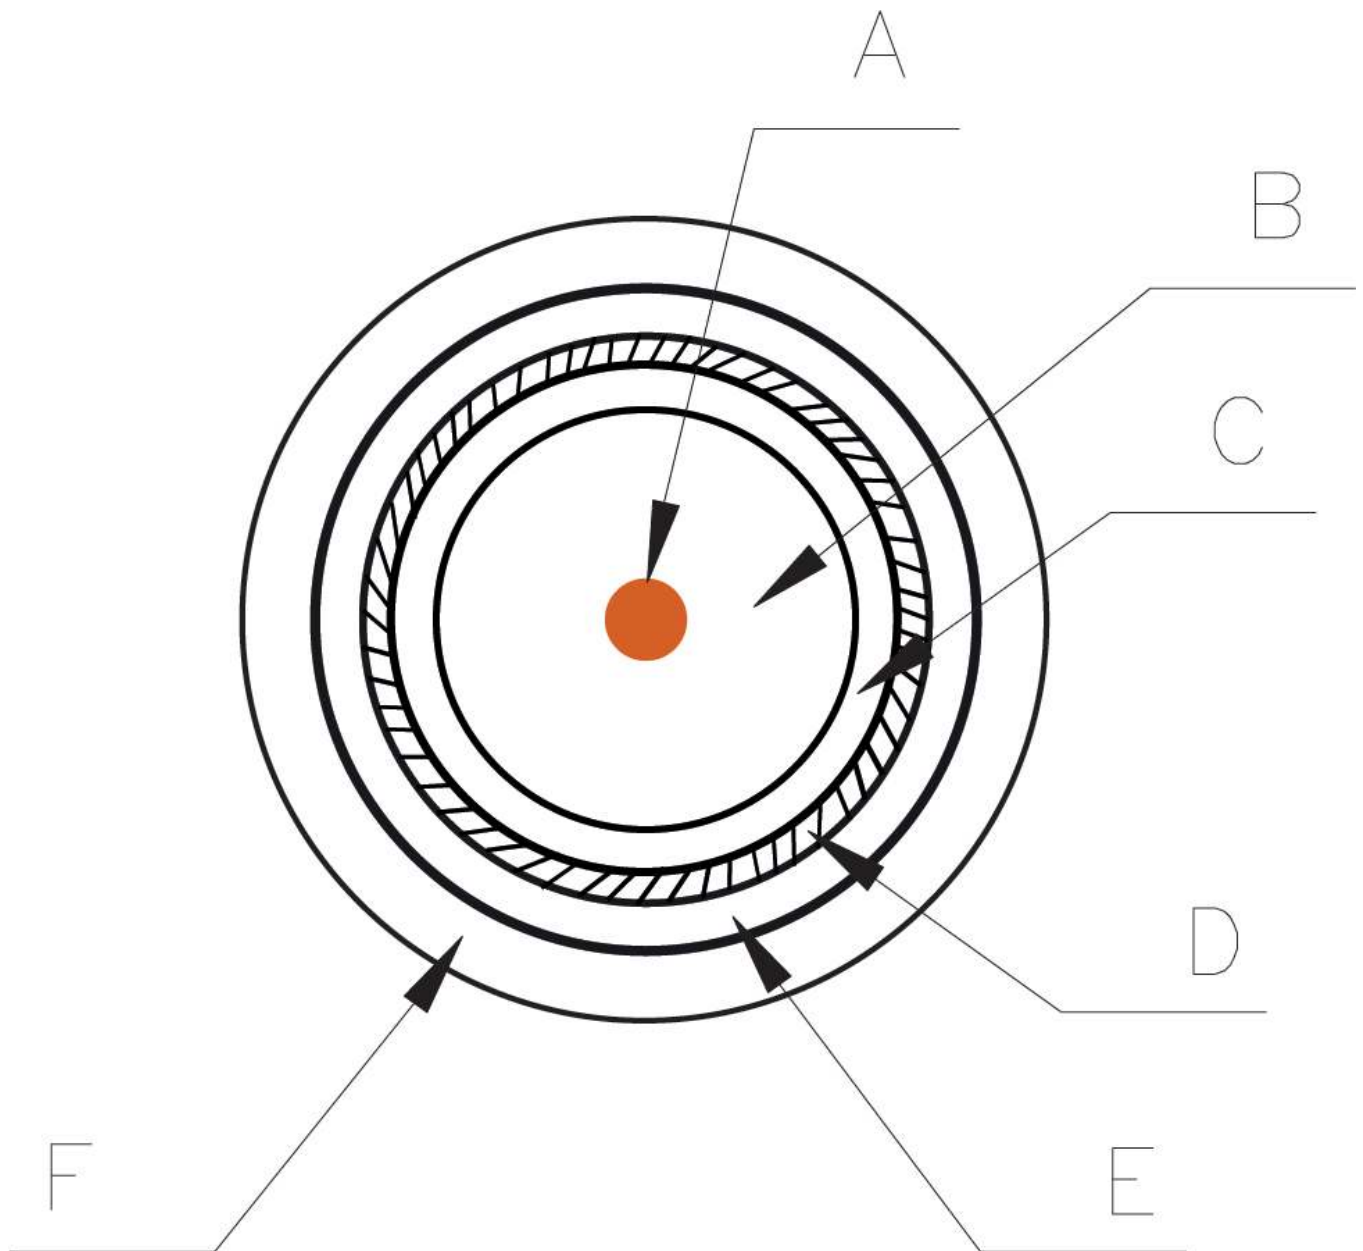

CABLE UNWINDING PROCESS

1. Place the cable with the label side down
2. Cut out the plastic in the central hole only*

3. Cut out the zip ties
4. Pull the cable by the end placed in the center hole
5. Stack with the label side down to protect the cable

**(Keep the surrounding plastic intact to avoid the cable unroll)*



Technical specifications : Ref. 214210

Model		CXT
Cable type		RG-6
Standard		EN 50117-9-2
Euroclass		Dca
Euroclass: Smoke Production		s2
Euroclass: Flaming droplets		d2
Euroclass: Acidity		a2
Class		B
Inner conductor Diameter	in	0,039
Inner conductor Material		Copper (Cu)
Inner conductor Resistance	Ohm/km	< 23
Dielectric Diameter	in	0,189
Dielectric Material		Foam polyethylene (PEE)
Dielectric Color		White RAL 9003
Overlapped foil		Copper + Polyester
Braid Material		Aluminium + Copper
Braid dimensions: No. of carriers (Nc)		16
Braid Dimensions: No. of strands per carrier (Ns)		3
Braid Dimensions: strand diameter (Ø)	in	0,005
Braid Resistance	Ohm/km	< 35
Braid Coverage	%	35
2nd foil		No
2nd foil glued to the dielectric		No
Petrol-Jelly		No
Anti-migrating film		Yes
Outer sheath Diameter	in	0,26
Outer sheath Material		LSFH
Minimum bending radius	in	1,299
Transfer impedance (5-30MHz)	mΩ /m	< 15
1GHz shielding	dB	> 75
Spark Test	Vac	3000
Capacitance	pF/m	55
Impedance	Ω	75
Velocity ratio	%	82
Operating temperature	°F	-13 ... 158
Atenuacion 5MHz	dB/m	0,01
Atenuacion 47MHz	dB/m	0,05
Atenuacion 54MHz	dB/m	0,05
Atenuacion 90MHz	dB/m	0,06
Atenuacion 200MHz	dB/m	0,09
Atenuacion 500MHz	dB/m	0,14
Atenuacion 698MHz	dB/m	0,16
Atenuacion 800MHz	dB/m	0,18
Atenuacion 862MHz	dB/m	0,19
Atenuacion 950MHz	dB/m	0,2
Atenuacion 1000MHz	dB/m	0,2
Atenuacion 1220MHz	dB/m	0,22
Atenuacion 1350MHz	dB/m	0,24
Atenuacion 1750MHz	dB/m	0,28
Atenuacion 2050MHz	dB/m	0,3
Atenuacion 2150MHz	dB/m	0,31
Atenuacion 2200MHz	dB/m	0,31
Atenuacion 2300MHz	dB/m	0,31
Atenuacion 2400MHz	dB/m	0,33
Atenuacion 3000MHz	dB/m	0,36
Return losses 5MHz	dB	23
Return losses 47MHz	dB	23
Return losses 54MHz	dB	23
Return losses 90MHz	dB	23
Return losses 200MHz	dB	23
Return losses 500MHz	dB	20
Return losses 698MHz	dB	20
Return losses 800MHz	dB	20
Return losses 862MHz	dB	20
Return losses 950MHz	dB	20
Return losses 1000MHz	dB	20
Return losses 1220MHz	dB	18
Return losses 1350MHz	dB	18
Return losses 1750MHz	dB	18
Return losses 2050MHz	dB	16
Return losses 2150MHz	dB	16
Return losses 2200MHz	dB	16
Return losses 2300MHz	dB	16
Return losses 2400MHz	dB	16
Return losses 3000MHz	dB	16