

FIBRE OPTICS CLEAVER

SINGLE MODE AND MULTIMODE FIBERS




REF.	ART. NR.	DESCRIPTION	EAN 13
232301	OSMN	F.O. CLEAVER	8424450187968



Equipped with **high quality and precision components**, this cleaver provides a perfect cut (90°), which usually generates a perfect fusion (0,01dB). The work process is facilitated by the assisted opening of the cutter. In addition, it includes a blade slider per magnet, which prevents premature tool wear. It incorporates positioning guides for fibers with coating of 250 and 900 microns, as well as for fibers with external protection of 3mm.

- Cleave length adjust 5-20mm
- High precision of cut for 125 microns fibers (90°)
- It incorporates a container to collect the excess of fibers after the cut, guaranteeing the safety of the operator.
- Blade life of 16 cutting spot positions x 1000 uses per position.
- It incorporates transport bag/protection, as well as a complete manual for its maintenance.



REF.	ART. NR.	 mm / in (xyz)	 g / lb	 U./Pack.
232301	OSMN	56 x 63 x 85 2.20 x 2.48 x 3.34	380 0.837	1 / box




Tool components:

- Blade slider
- V groove guides for 250 microns
- V groove guides for 900 microns
- V groove guides for fibers with external protection of 3mm
- Cutting blade
- Cutting magnet

Rubber support for fibers

Fibre clamping flange

Fibre scrap collector

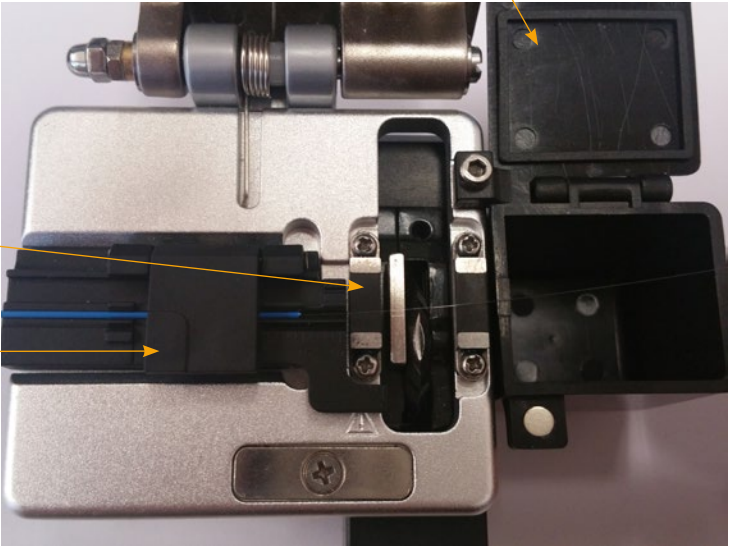

Cleaver detail with fibre optic ready for cutting