


Congratulations on purchasing an EDISION ping

Please note that this information is valid at the time of publication.

Current information and detailed user manuals can be found on the Internet at: www.edision.gr

1 Unpacking



Remote control with 2 AAA batteries



Documentation



Service note

Please contact your EDISION specialist dealer for any further support and service.

Receiver EDISION ping

Notes: The front is factory fitted with a protective foil which can be removed easily and with caution. (Protective foil only for devices with display)

The scope of delivery may also include parts not listed here

Front Panel

- ① Infrared sensor for the reception of remote control commands

Back Panel

- ② HD OUT: Connection to an HDTV quality TV
- ③ S/PDIF: Audio interface for amplifier/audio console
- ④ AV OUT: For broadcasting video and sound signals (optional)
- ⑤ ETHERNET: Ethernet port RJ45 10/100 Mbps
- ⑥ Connection for an adapter (DC 5V/2,0A)

Subpage


- ⑦ IR IN: Infrared connection port (optional)
- ⑧ USB: Connection for USB storage devices



2 Connecting and switching on

Note: For the proper function of the OTT receiver, the suggested internet connection must be with Ethernet cable, at 10Mbps and more.

- Connect the receiver using **HDMI cable** via the HD OUT output port to your TV's HDMI input port
- Connect the receiver via the input ETHERNET with network cable.
- Insert the batteries into the remote control. Notes on the remote control can be found on the back of these instructions.
- Connect the receiver to the power supply.
- The receiver starts with the BOOT process and is operational within a short time

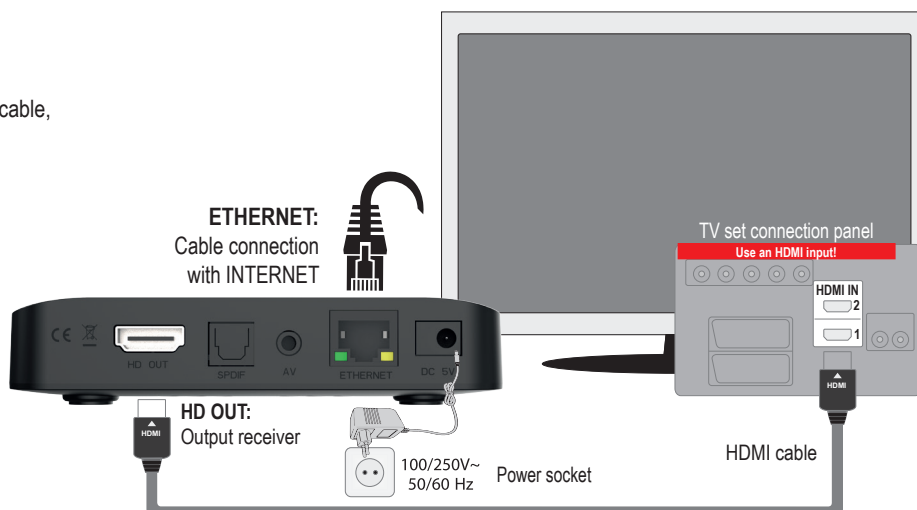

For information about EDISION Hardware or Software matters, please contact support@edision.gr

3 Remote Control UNIVERSAL 2in1



EDISION UNIVERSAL 2in1 REMOTE CONTROL is compatible with all EDISION STB's*, plus it is pre-programmed with 5 basic functions for SAMSUNG & LG** tv sets. Alternatively, you can program its 5 programmable buttons to any 5 functions of your TV.



Power

Switches between operation and standby



< (PREV)

Return to the previous channel/service or move to the end of the Service List or the Play List



Help

This provides users with a quick guide of using Edision Ping



Menu

Open main menu & select sub menu using by navigation buttons



EXIT

Close and return to the previous menu and screen



TV / RADIO

Switch to TV mode.

Switch to Radio mode



COLOR BUTTONS

Activates certain menu functions.

Usage instructions are shown in each OSD menu



Audio

Select an audio track and a sound mode



PLAY

Starts timeshift if available



REC

Activates immediately recording-option



NUMERIC KEY (0-9)

Control the numerical operation and change the Channel/Service number directly



> (NEXT)

Go to the next channel/service or move to the beginning of the Service List or the Play List



TIMER

Start timer function



INFO

Displays the Electronic Program Guide (EPG) information if provided



EPG

Displays the Electronic Program Guide (EPG) information if provided



Mute

Mutes or unmutes the audio temporarily



TEXT

Switch between the teletext and TV modes



SUBTITLE

Display the subtitle language list


Notes: Many of the listed buttons have multiple functions, which, are displayed in the menus. Some buttons and functions are optional. Important functions and buttons are briefly explained below. The buttons to be used are marked in red in the diagrams.

MANUAL INSTRUCTION FOR LEARN REMOTE CONTROL EDISION UNIVERSAL 2in1

Your set-top-box remote control has 5 learning-function keys, in the up right hand side TV keypad panel area. Each one can be used accordingly as the following example:

1. Turning your TV set ON/OFF **[TV POWER]**
2. Selecting screen **RATIO [Auto, 16:9, 4:3, etc]**
3. Increasing/decreasing volume **[VOL+ , VOL-]**
4. Command confirmation **[BACK or EXIT]**

The other 48 keys are for the control of the EDISION set-top-box.



SET UP FOR LEARNING FUNCTION

- Press **[TV POWER]** key in the up right hand side TV keypad panel area continuously for 5 Sec. until the LED lights up and keep lighting, then release the key. This means the remote control is in the learning mode.
- Within 10 seconds, press the key in the original TV IR control, which needs to be learned, for example the **[POWER]** key, then the red LED is flashing. It means this button is ready to receive the learning signal.
- Aim the emission port of the original TV remote control at the front at the emission port at the front of your set-top box remote control (distance between these two ports has to be about 2~3 CM).
- Then press the key which is to be learned in your original TV remote control, for example the **[POWER]** key of your original TV remote control continuously for 3 seconds. If the red LED flashes quickly for three times and keep lighting, it means the set-top box remote control has succeeded in receiving the signal and you have completed the learning procedure of ON/OFF **[TV POWER]** key.
- Then release the **[POWER]** key of your original TV remote control.

If the copying procedure fails, the red LED will blink and stay OFF. In this case please repeat the procedure.

For the next programmable function, please repeat steps 1 to 3:

- Selecting screen ratio with **RATIO [Auto, 16:9, 4:3, etc]**
- Increasing/decreasing volume **[VOL+ , VOL-]**
- Command confirmation **[BACK or EXIT]**

Now you can operate your TV with the 5 programmed by you keys of your set-top box remote control. During the operation, the LED will flash to indicate that the signal is transmitted!

* For EDISION STB compatibility, please visit our webpage

**LG & SAMSUNG are brand names that belong solely to LG Electronics Inc. and Samsung Electronics Co., Ltd respectively. Any brand name reference in this text is only for informational purposes towards the consumer that is interested in the product.

Visit us on:

www.edision.gr